

A

B

C

D

DO NOT MEASURE DRAWING . IF IN DOUBT PLEASE ASK.



TEFLON RING

M48x1.5

R50

Ø32 f7

HEX-41

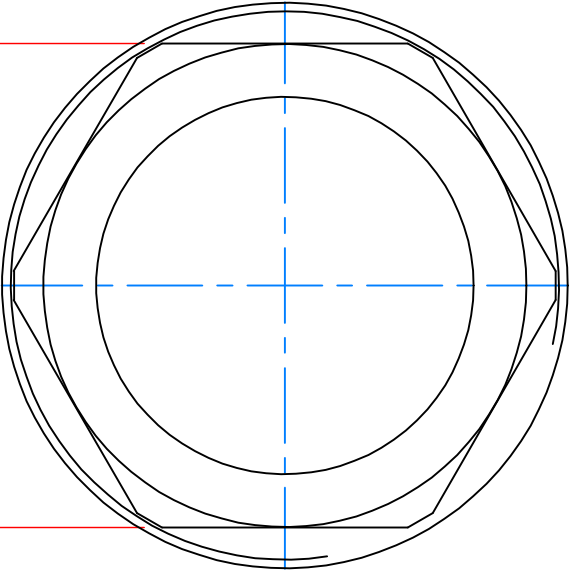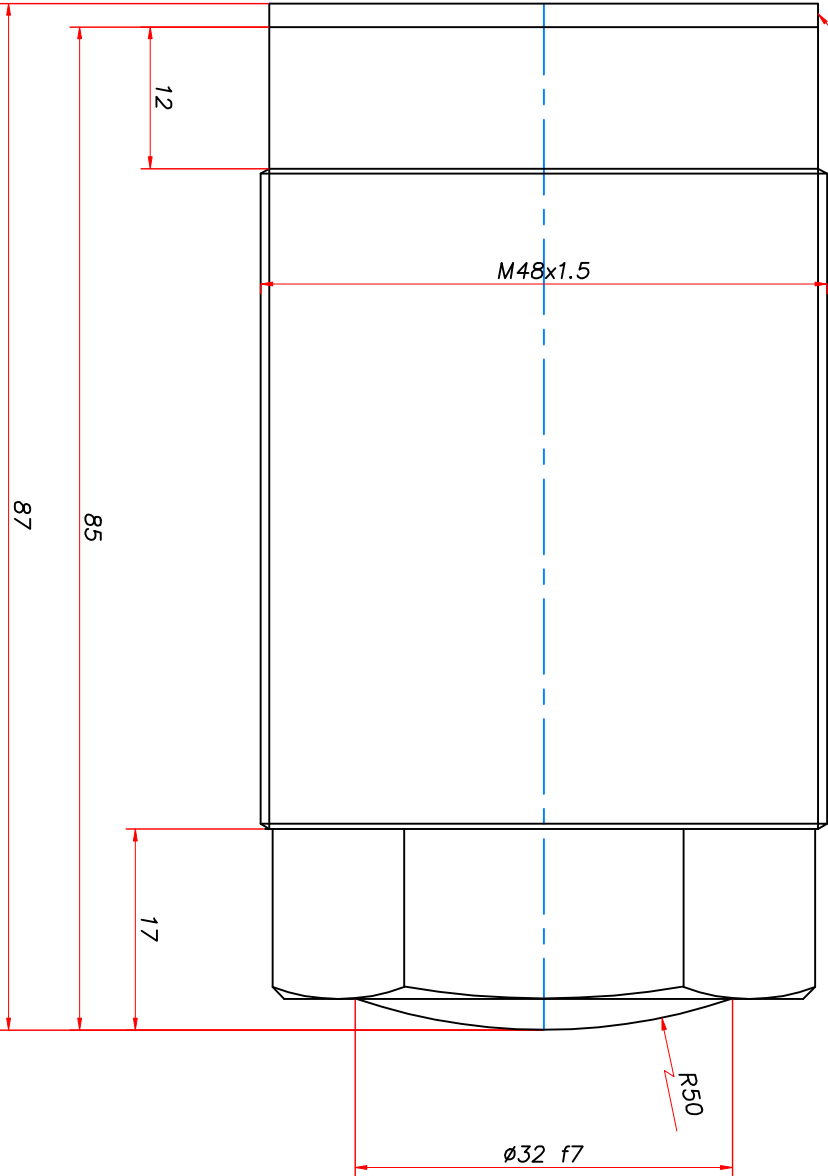

Surface Finish	▽▽▽			▽▽			▽			▽		~
Ra Value-μ	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Roughness No.	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12

All dimensions are in mm unless specified				Unspecified m/c deviations (med to IS 2102)			
TITLE		MINI THREADED BODY CYLINDER SINGLE ACTING SPRING RETURN		Linear- Length or Diameter		Over	
MODEL		4451-611		Up to 6		Up to 6	
RAM SIZE		Ø32		PROJECTION 3rd ANGLE		TOL	
STROKE		16		MOUNTING		THREADED BODY	
CUSHIONING		NIL		MIN PR.		10 kg/cm²	
SCALE		NTS		MAX PR.		200 kg/cm²	
DRN		11/01/16		BREAK WAY PR.		-----	
SKH		11/01/16		PRECISION ENGINEERING ACCESSORIES		PEENTYA BANGALORE	
CHKD		11/01/16		PRECISION ENGINEERING ACCESSORIES		PEENTYA BANGALORE	
APPD		11/01/16		PRECISION ENGINEERING ACCESSORIES		PEENTYA BANGALORE	
RBP		11/01/16		PRECISION ENGINEERING ACCESSORIES		PEENTYA BANGALORE	
RBP		11/01/16		PRECISION ENGINEERING ACCESSORIES		PEENTYA BANGALORE	