


DO NOT MEASURE DRAWING . IF IN DOUBT PLEASE ASK.

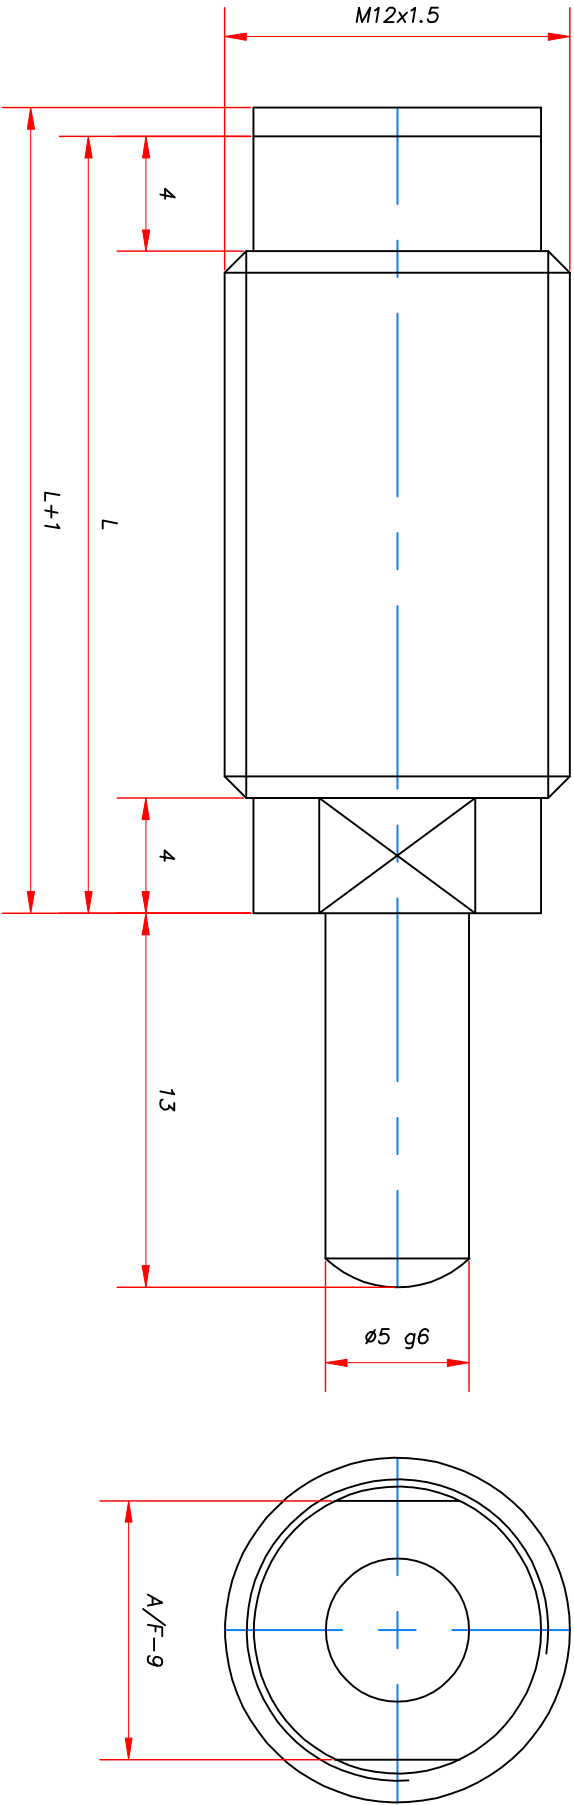

SPECIFICATION TABLE			
SL No.	MODEL CODE	STROKE	L
1	4451-121	5	27
2	4451-122	10	40

Surface Finish	▽▽▽	▽▽	▽	~
Ra Value-μ	0.025	0.05	0.1	0.2
Roughness No.	N1	N2	N3	N4

All dimensions are in mm unless specified			
TITLE	HYDRAULIC MINI THREADED CYLINDER SINGLE ACTING		
MODEL	4451-121 & 4451-122		
BORE SIZE	8	PROJECTION	3rd ANGLE
P.R SIZE	5	MOUNTING	THREADED
STROKE	REFER SPECIFICATION TABLE	MIN. WORKING PR.	10 kg/cm²
SCALE	NTS	MAX WORKING PR.	200 kg/cm²
DRN	RBP 11/01/16	BREAKAWAY PR.	-----
CHKD	RBP 11/01/16	PRECISION ENGINEERING ACCESSORIES PREENYA BANGALORE	
APPD	RBP 11/01/16		