


DO NOT MEASURE DRAWING . IF IN DOUBT PLEASE ASK.

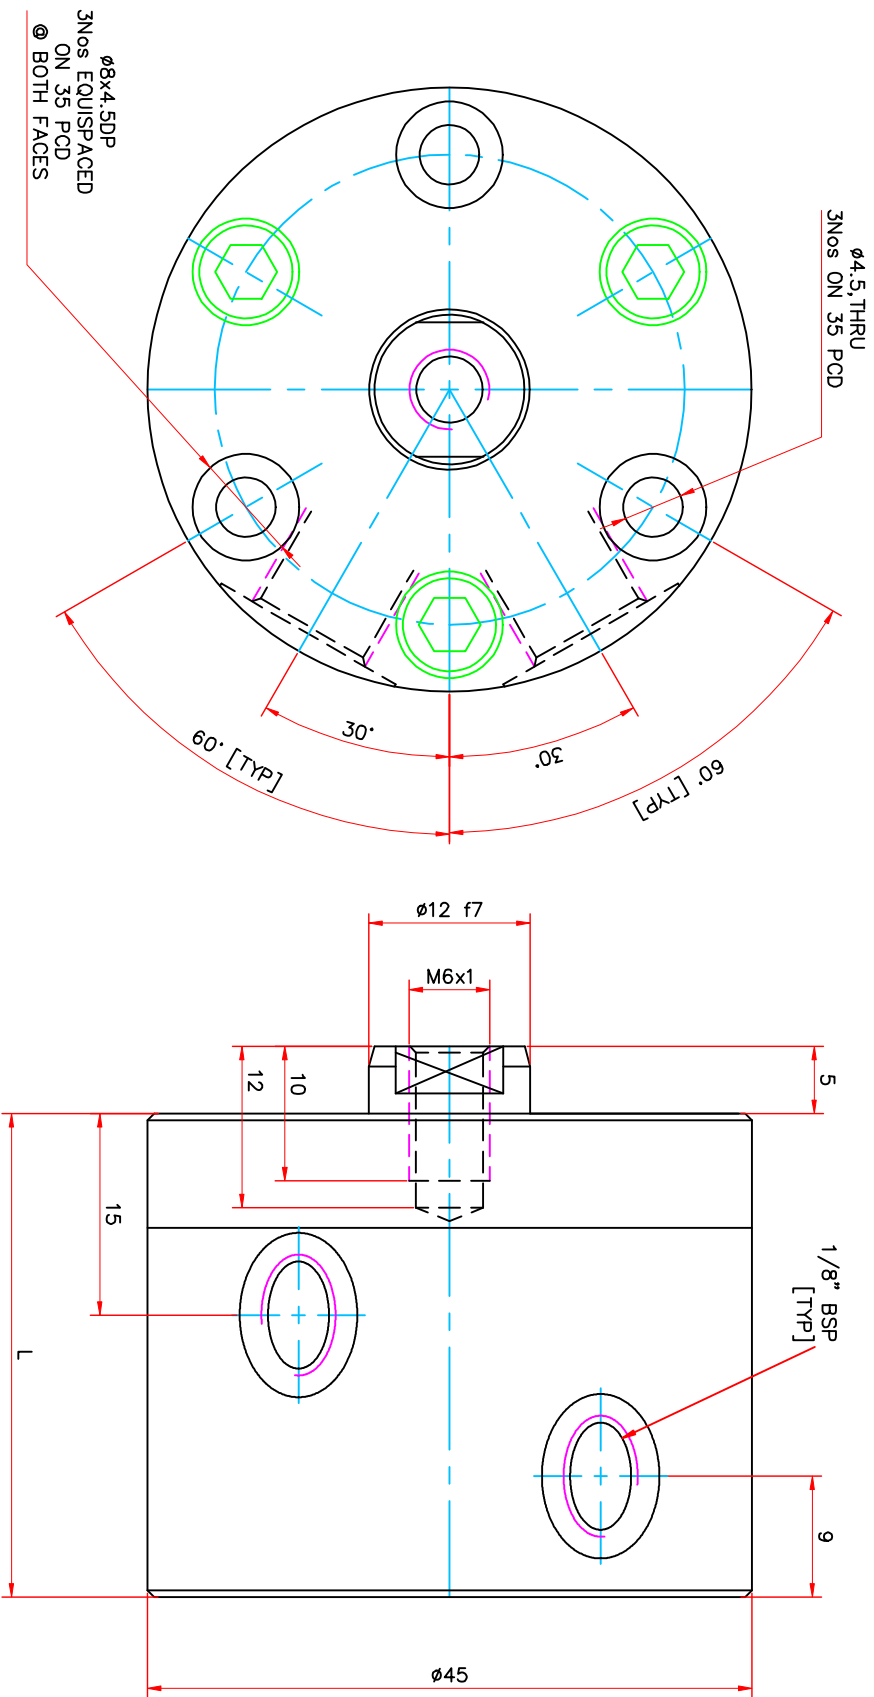

SPECIFICATION TABLE			
SL No.	MODEL CODE	STROKE	L
1	4360-121	10	36
2	4360-122	25	51

Surface Finish											
Ra Value-μ											
Roughness No.											
0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

All dimensions are in mm unless specified			
TITLE			
HYDRAULIC COMPACT CYLINDER DOUBLE ACTING			
MODEL			
4360-121/122			
BORE SIZE			
Ø20			
P.R SIZE			
Ø12			
STROKE			
REFER SPEC. TABLE			
SCALE			
NTS			
DRN			
RBP 15/12/15			
CHKD			
RBP 15/12/15			
APPD			
RBP 15/12/15			
PRECISION ENGINEERING ACCESSORIES			
PREBNTYA BANGALORE			

Unspecified m/c deviations (mes to IS 2102)			
Linear-length or Diameter			
Over			
6	30	±0.1	±0.1
30	120	±0.2	±0.2
120	315	±0.5	±0.5
315	1000	±0.8	±0.8
1000	2000	±1.2	±1.2
Length of stock side of angle			
Over			
6	30	±1°	±1°
30	120	±30°	±30°
120	315	±20°	±20°
315	1000	±10°	±10°