
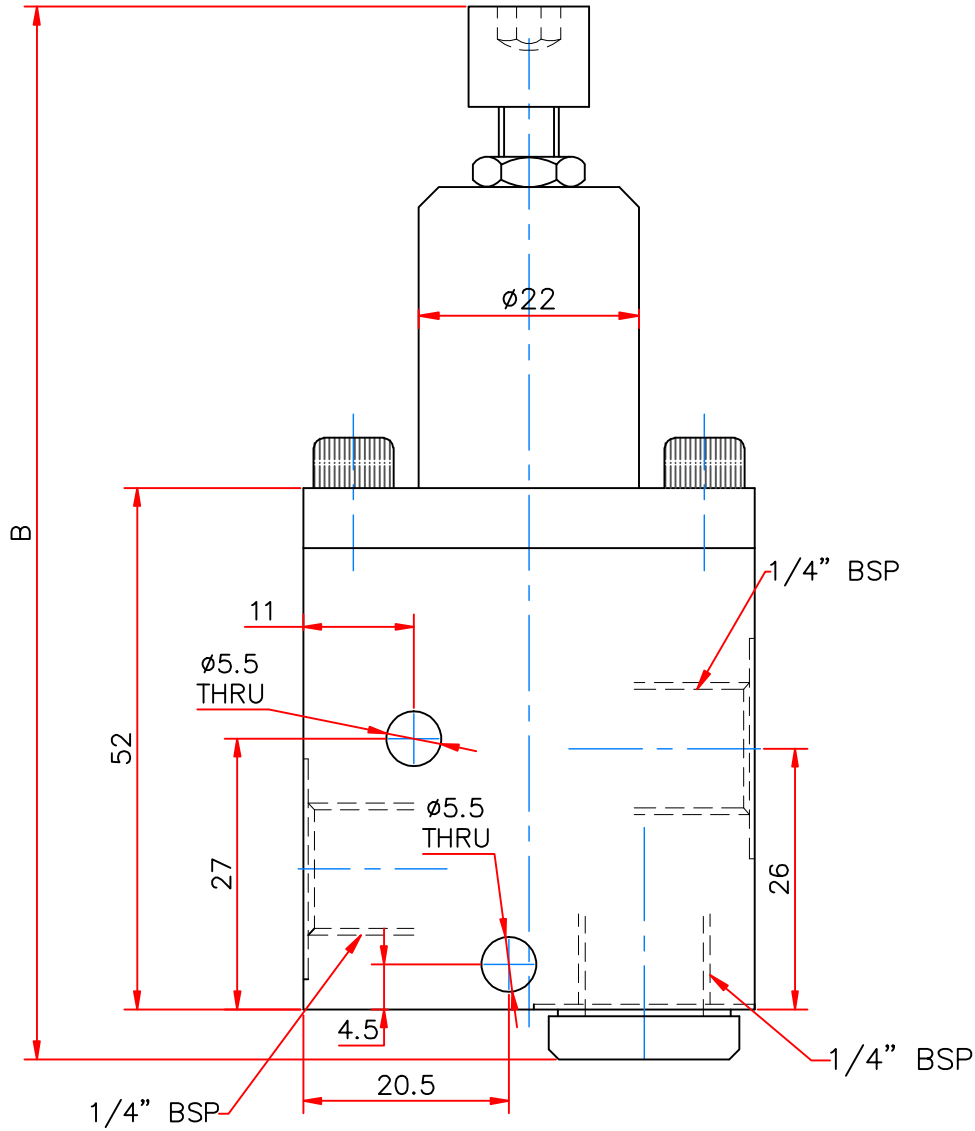



DO NOT MEASURE DRAWING . IF IN DOUBT PLEASE ASK.

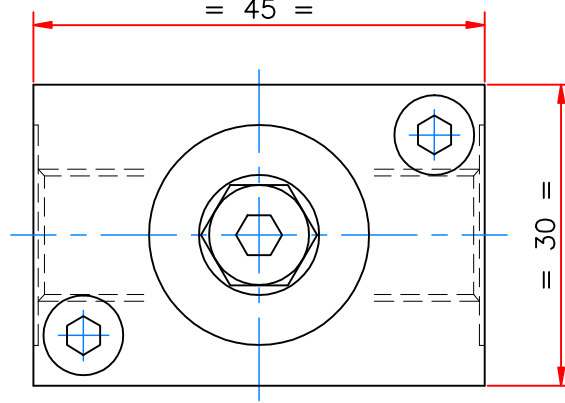

SPECIFICATION TABLE			
SL No.	MODEL CODE	RANGE OF ADJ.	B (max)
1	5311-111	20-150 kg/cm ²	105
2	5311-112	100-200 kg/cm ²	135

All dimensions are in mm unless specified				Unspecified m/c deviations (med to IS 2102)					
TITLE		HYDRAULIC SEQUENCE VALVE		Linear-Length or Diameter					
MODEL		5311-111/112		Over	Upto & Inc.	TOL			
RANGE OF ADJUSTMENT		20-250 kg/cm ²		—	6	±0.1			
PORT SIZE		1/4" BSP		6	30	±0.2			
MIN. WORKING PR.		250 kg/cm ²		30	120	±0.3			
MAX. WORKING PR.		10 kg/cm ²		120	315	±0.5			
SCALE		NTS		315	1000	±0.8			
DRN		RBP		15/12/15	1000	±1.2			
CHKD		RBP		15/12/15	Length of shorter side of angle				
APPD		RBP		15/12/15	Over	Upto & Inc.	TOL		
PROJECTION		3rd ANGLE					—	6	±1°
PRECISION ENGINEERING ACCESSORIES		PEENYA		BANGALORE		6	30	±30°	
						30	120	±20°	
						120	315	±10°	